

luminous flux:	3000 lm	2500 lm	1500 lm
maximum power:	30W	29W	19W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	2,2A	1,9A	1A
current at 28V:	1,2A	1A	0,6A
maximum current:	2,2A	1,9A	1A
colour temperature:	5500÷6000K		
beam:	wide, spot		
beam angle:	50°, 66° x 22°, 6°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	V		
built-in connectors:	-		
other:	protection: - against overheating - against reverse polarisation		



The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

A - tractors Valtra series:

M120, M120E, M130, M150, N101, N103 HiTech, N111, N111e, N113 HiTech 5, N121, N122 Direct, N122 Versu, N123 Direct, N123 HiTech 5, N123 Versu, N141, N142 Direct, N142, Versu, N143 Direct, N143 HiTech, N143 Versu, N163 Direct, N163 Versu, N82 HiTech, N91, N92, N93 HiTech, N93 HiTech5, T120, T121C, T130, T131C, T131H, T132 Direct, T132 Versu, T133 Hitech, T140E, T140ECH, T150, T150CH, T151EH, T152 Direct, T152 Versu, T153 Direct, T153 Hitech, T153 Versu, T160, T160CH, T161H, T162 Direct, T162 Versu, T163E Direct, T163E Versu, T170, T171H, T172 Direct, T172 Versu, T173 Hitech, T180, T182 Direct, T182 Versu, T183 Direct, T183 Versu, T190, T191H, T193 Hitech, T202 Direct, T202 Versu, T203 Direct, T213 Versu, X100, X110, X120, XM130, XM150

- tractors Deutz Fahr series:


Agroclimber (STAGE 3A), Agrofarm, Agrofarm (STAGE 3A), Agrofarm T-TB (STAGE 3A), Agrolux, Agrolux (STAGE 2), Agrolux (STAGE 3A), AGROLUX INDIA (STAGE 1), AGROLUX INDIA TREM (STAGE 3A), Agroplus (STAGE 3A), Agroplus F (STAGE 3A), Agroplus F ECOLINE, Agroplus F KEYLINE, Agroplus F KEYLINE (FARMOTION STAGE 3B), Agroplus S (STAGE 3A), Agroplus V (STAGE 3A)

- tractors Hurlimann series:


JOKER, JOKER (STAGE 3A), JOKER (TIER 2), XA (STAGE 3A), XA TRADITION (FARMOTION STAGE 3A), XB (STAGE 3A), XB MAX, XB MAX (STAGE 3A), XB T-TB (STAGE 3A), XE (TIER 3), XF (STAGE 3A), XF SPIRIT, XF SPIRIT (FARMOTION STAGE 3B), XF TRADITION, XS (STAGE 3A), XT (STAGE 3A), XV (STAGE 3A)

- tractors Lamborghini series:

C, CF, CRONO (STAGE 3A), CV, R2 (STAGE 3A), R2 TARGET (STAGE 3A), R3, R3 (STAGE 3A), R3 EVO, R3 EVO (STAGE 3A), R3 TREND, R3 T-TB (STAGE 3A), R4 (STAGE 3A), REKORD, REKORD (STAGE 2), REKORD (STAGE 3A), RF (STAGE 3A), RF TARGET, RF TARGET, RF TREND (FARMOTION STAGE 3B), RS (STAGE 3A), RV (STAGE 3A)

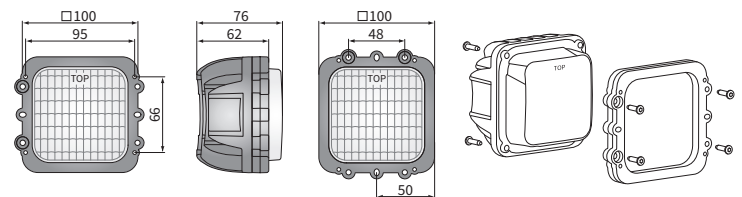

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane h=2,5m

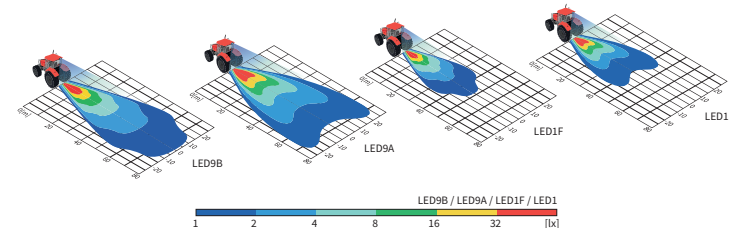

Cat. number	Valtra Catal. No.	Luminous flux			Optics	FF	Beam angle		Accessories	LED module 12V-24V	cable 0,35 m	cable 0,5 m	Connectors	Deutsch DT	Application	dedicated
		3000 lm	2500 lm	1500 lm			50°	66° x 22°								
LED9B.53839	V39077400, V36520700	✓				✓	✓			✓	✓			✓		A
LED9A.53739	V39077400, V36520700	✓						✓		✓	✓			✓		A
LED8F.51088			✓			✓			✓	✓		✓				
LED1F.47439	V39077400, V36520700			✓		✓			✓	✓	✓			✓		A
LED1.46899	V39077400, V36520700			✓				✓		✓	✓			✓		A