

light functions:	work light	position	work light
luminous flux:	14000 lm	-	8000 lm
maximum power:	160W	1,6W	76W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	12A	0,06A	5,5A
current at 28V:	6A	0,06A	2,7A
maximum current:	13A	0,06A	8A
colour temperature:			
beam:	diffused		
beam angle:	100°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	III		
other:	protection: - against overheating - against reverse polarisation		

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.



The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.


Correct polarity required.

Because of significant power, CDP1D work lamp must have good airflow ensured. Otherwise, temporary limitation of maximal power may occur.

It is possible to install needed connectors on wire (on request).

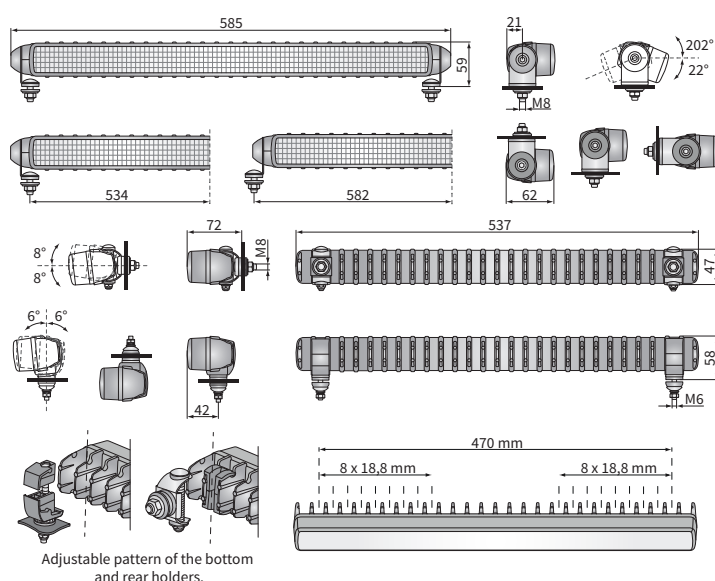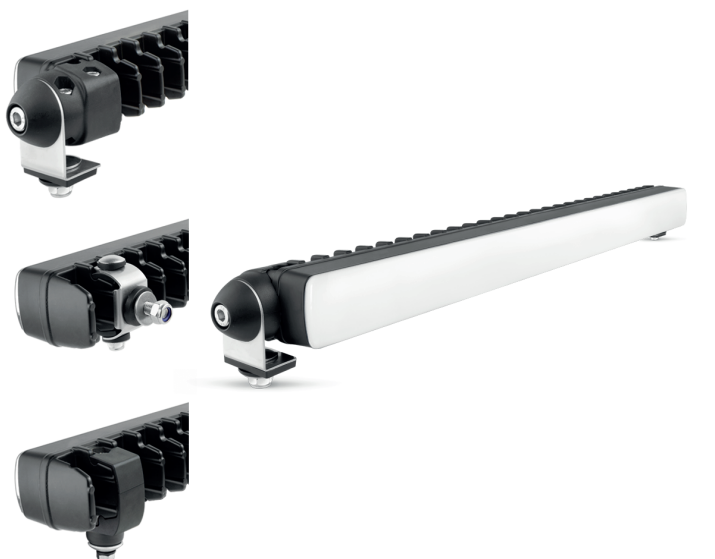

Lamp positioning: 8° from the vertical plane h=2,5m

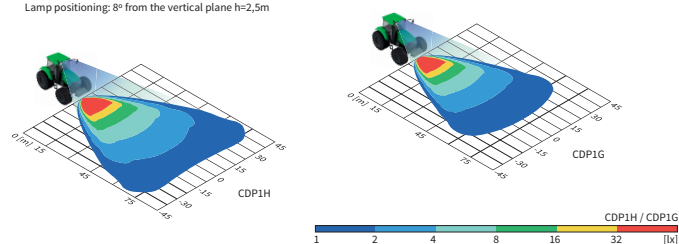

Cat. number	Light functions	work light	position	Luminous flux	14000 lm	8000 lm	Rated power	160W	76W	IP rating	IP67	IP69K	housing	black	white	Accessories	LED module 12V-24V	cable 0,5 m	cable 8 m	Type of bracket	rear	bottom	side	Connectors	Deutsch DT	AMP SuperSeal 115
CDP1H.62400		✓	✓		✓			✓			✓	✓		✓			✓	✓			✓					
CDP1H.62430		✓	✓		✓			✓			✓	✓		✓			✓	✓				✓				
CDP1H.62431		✓	✓		✓			✓			✓	✓			✓		✓	✓			✓					
CDP1H.62460		✓	✓		✓			✓			✓	✓		✓			✓	✓				✓				
CDP1H.62480					✓			✓			✓	✓		✓			✓	✓			✓		✓			
CDP1G.62300		✓	✓			✓			✓		✓	✓		✓			✓	✓			✓		✓			
CDP1G.62330		✓	✓						✓		✓	✓		✓			✓	✓			✓					
CDP1G.62331		✓	✓			✓			✓		✓	✓			✓		✓	✓			✓					
CDP1G.62360		✓	✓			✓			✓		✓	✓		✓			✓	✓				✓				
CDP1G.62380		✓	✓			✓			✓		✓	✓		✓			✓	✓			✓		✓			