

luminous flux:	10000 lm	7000 lm
maximum power:	100W	60W
rated voltage:	12÷24V DC	
permissible voltage:	10,5÷30V DC	
current at 13,2V:	8A	4,5A
current at 28V:	3,5A	2,1A
maximum current:	10A	5,5A
colour temperature:	5500÷6000K	
beam:	spot	
beam angle:	4°	
IP rating:	IP67, IP69K	
work temperature:	-40°C ÷ 80°C	
housing's material:	aluminium	
lens' material:	plastic, glass	
corrosion resistance:	ISO 9227, 500h	
vibration resistance:	15,3G 24÷2000Hz	
EMC Class CISPR 25:	III	
built-in connectors:	Deutsch DT, AMP SuperSeal 1,5	
other:	protection: - against overheating - against reverse polarisation	



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.



The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

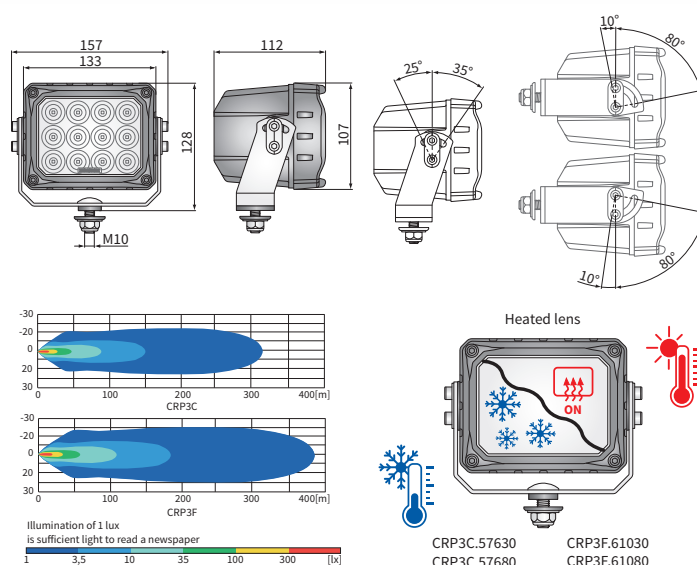

CRP3C.57630
CRP3C.57680

CRP3F.61030
CRP3F.61080

Cat. number	Luminous flux		IP rating	IP67	IP69K	Type of bracket	bottom	rear	Lens material	plastic	glass	Additional options	heated lens	Color of the grille	metallic	black	Accessories	LED module 12V-24V cable 0,5 m	Connectors	Deutsch DT	AMP SuperSeal 1,5
	10000 lm	7000 lm																			
CRP3F.61000	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61001	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61030	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61031	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61025	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61026	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61020	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61021	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61050	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61051	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61080	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61081	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61075	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61076	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61070	✓			✓	✓		✓		✓						✓			✓			
CRP3F.61071	✓			✓	✓		✓		✓						✓			✓			

Cat. number	Luminous flux		IP rating	IP67	IP69K	Type of bracket	bottom	rear	Lens material	plastic	glass	Additional options	heated lens	Color of the grille	metallic	black	Accessories	LED module 12V-24V cable 0,5 m	Connectors	Deutsch DT	AMP SuperSeal 1,5
	10000 lm	7000 lm																			
CRP3C.57600		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57601		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57630		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57631		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57625		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57626		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57620		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57621		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57650		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57651		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57680		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57681		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57675		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57676		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57670		✓		✓	✓		✓		✓						✓			✓			
CRP3C.57671		✓		✓	✓		✓		✓						✓			✓			