

luminous flux:	500 lm
maximum power:	9W
rated voltage:	12÷24V DC
permissible voltage:	10,5÷30V DC
current at 13,2V:	0,6A
current at 28V:	0,3A
maximum current:	0,8A
colour temperature:	4500÷5000K
beam:	wide
beam angle:	32° x 13°
IP rating:	IP67, IP69K, IP66
work temperature:	-40°C ÷ 80°C
housing's material:	aluminium / plastic
lens' material:	glass
corrosion resistance:	ISO 9227, 500h
vibration resistance:	15,3G 24÷2000Hz
EMC Class CISPR 25:	III
built-in connectors:	AMP Faston 250, Deutsch DT
other:	protection: - against overheating - against reverse polarisation



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess, as a freestanding on the body work.

Versions with the bracket can be installed on a vehicle in an upright or upside-down position.


It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

AMP Faston 250 plug 2-pin - cat. No. A.07138

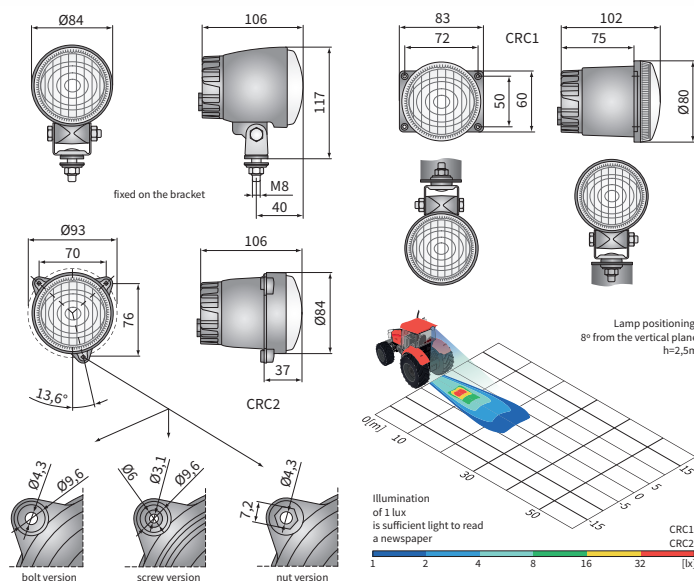

Cat. number	Diameter		IP rating	Accessories	LED module 12V-24V	cable 0,5 m	cable 0,15 m	Mounting method	in recess	installed vertically up	Bracket	4 bolts	M8	3 screws	3 bolts	3 nuts	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5
	Ø80	Ø84																		
<b>CRC1.48101</b>	✓				✓	✓			✓			✓								
CRC1.48121	✓			✓	✓				✓			✓					✓			
CRC1.48131	✓				✓	✓			✓			✓						✓		
CRC1.48111	✓				✓	✓	✓		✓			✓						✓		
CRC1.48112	✓				✓	✓	✓		✓			✓							✓	
<b>CRC2.48201</b>		✓			✓	✓				✓			✓							
<b>CRC2.48203</b>		✓		✓	✓	✓				✓			✓				✓			
<b>CRC2.48204</b>		✓			✓	✓				✓			✓					✓		
CRC2.48202		✓			✓	✓	✓			✓			✓						✓	
CRC2.48211		✓			✓	✓			✓					✓						
CRC2.48213		✓		✓	✓				✓					✓			✓			
<b>CRC2.48214</b>		✓			✓	✓			✓					✓				✓		
<b>CRC2.48212</b>		✓			✓	✓	✓		✓					✓				✓		
<b>CRC2.48221</b>		✓			✓	✓			✓						✓					
CRC2.48223		✓			✓	✓			✓						✓		✓			
CRC2.48224		✓			✓	✓			✓						✓			✓		
CRC2.48222		✓			✓	✓	✓		✓						✓			✓		
CRC2.48231		✓			✓	✓			✓							✓				
CRC2.48233		✓		✓	✓				✓							✓	✓			
CRC2.48234		✓			✓	✓			✓							✓		✓		
CRC2.48232		✓			✓	✓	✓		✓							✓		✓		