



**TECHNICAL DATA / FEATURES**

- dimensions:  $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 35°, 58°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation



**ADDITIONAL INFORMATION**

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence. Correct polarity required.

They can be installed in any position (standing, hanging, on side).


- Useful parts while installing:
- deutsch plug DT06-2S 2-pin - cat. No. A.07135
  - AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
  - AMP Faston 250 plug 2-pin - cat. No. A.07138

Dedicated application:


A - tractors Valtra series:

- A4: A74, A84, A94, A104, A114, A124, A134,
- G5: G105, G115, G125, G135,
- N4: N104, N114E, N124, N134, N154E, N174,
- N5: N135, N155E, N175,
- T4: T144, T154, T174E, T194, T214, T234,
- T5: T145, T155, T175E, T195, T215, T235, T255

**DIMENSIONS**

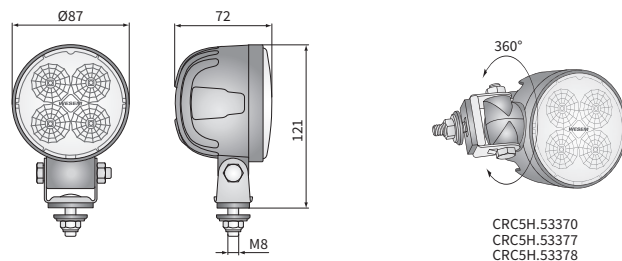

CRC5H.53370  
CRC5H.53377  
CRC5H.53378

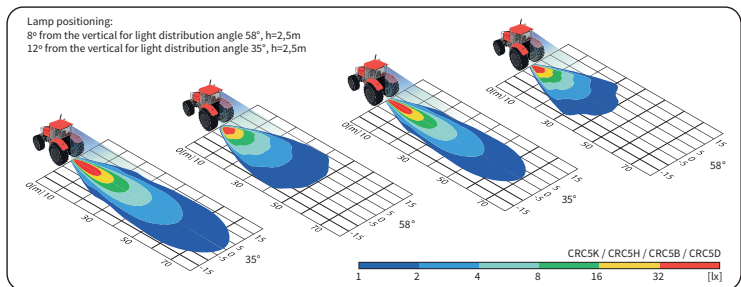

Cat. number	Luminous flux			Beam angle		IP rating	Accessories	handle	cable 0.5 m	cable 0.15 m	swivel mount	Connectors	Application dedicated
	2000 lm	1500 lm	1000 lm	35°	58°								
<b>CRC5K.54801</b>	✓	✓	✓	✓	✓								
<b>CRC5K.54806</b>	✓	✓	✓	✓	✓								
<b>CRC5K.54814</b>	✓	✓	✓	✓	✓								
CRC5K.54815	✓	✓	✓	✓	✓								
CRC5K.54803	✓	✓	✓	✓	✓								
<b>CRC5H.53301</b>	✓	✓	✓	✓	✓								
CRC5H.53370	✓	✓	✓	✓	✓								
CRC5H.53306	✓	✓	✓	✓	✓								
<b>CRC5H.53314</b>	✓	✓	✓	✓	✓								
CRC5H.53377	✓	✓	✓	✓	✓								
CRC5H.53378	✓	✓	✓	✓	✓								
CRC5H.53315	✓	✓	✓	✓	✓								
CRC5H.53303	✓	✓	✓	✓	✓								
<b>CRC5B.50001</b>		✓		✓	✓								
<b>CRC5B.50006</b>		✓		✓	✓								
<b>CRC5B.50014</b>		✓		✓	✓								
CRC5B.50002		✓		✓	✓								
CRC5B.50015		✓		✓	✓								

Cat. number	Luminous flux			Beam angle		IP rating	Accessories	handle	cable 0.5 m	cable 0.15 m	swivel mount	Connectors	Application dedicated
	2000 lm	1500 lm	1000 lm	35°	58°								
<b>CRC5D.51601</b>		✓		✓	✓								
CRC5D.51609		✓		✓	✓								
CRC5D.51606		✓		✓	✓								
<b>CRC5D.51614</b>		✓		✓	✓								
CRC5D.51602		✓		✓	✓								
CRC5D.51615		✓		✓	✓								
<b>CRC5A.49401</b>			✓	✓	✓								
<b>CRC5A.49406</b>			✓	✓	✓								
<b>CRC5A.49414</b>			✓	✓	✓								
CRC5A.49402			✓	✓	✓								
CRC5A.49415			✓	✓	✓								
<b>CRC5C.51501</b>			✓	✓	✓								
CRC5C.51504			✓	✓	✓								
CRC5C.51506			✓	✓	✓								
<b>CRC5C.51514</b>			✓	✓	✓								
CRC5C.51502			✓	✓	✓								
CRC5C.51515			✓	✓	✓								