

luminous flux:	2000 lm	1500 lm	1000 lm
maximum power:	21W	18W	14,5W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	1,2A	1,1A	0,9A
current at 28V:	0,6A		0,5A
maximum current:	2,2A	1,1A	0,9A
colour temperature:	6000÷6500K	5000÷5500K	
beam:	wide		
beam angle:	35°, 58°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	III	V	
built-in connectors:	AMP SuperSeal 1,5, Deutsch DT		
other:	protection: - against overheating - against reverse polarisation		

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.


Mounting: factory prepared places, built-in to vehicle's recess.

It is possible to install needed connectors for a version with cable (on request).


Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

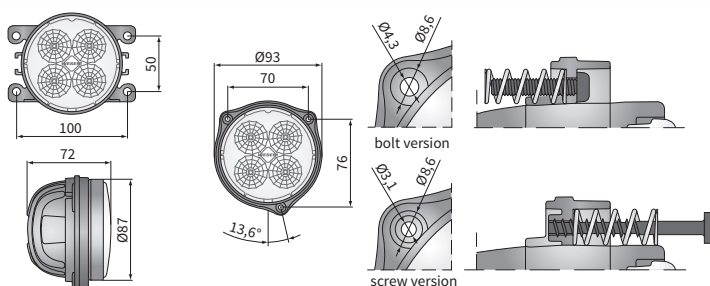

Lamp positioning:
8° from the vertical for light distribution angle 58°, h=2,5m
12° from the vertical for light distribution angle 35°, h=2,5m

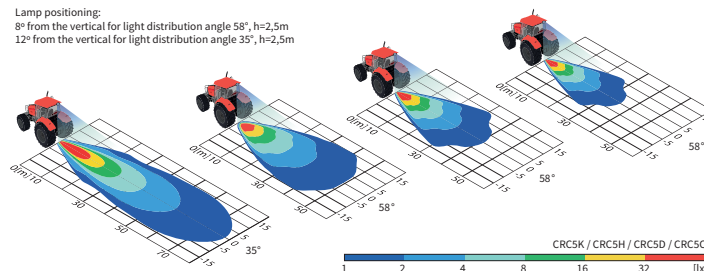

Cat. number	Luminous flux			Beam angle	35°	58°	IP rating	IP67	IP69K	Accessories	LED module 12V/24V	cable 0,5 m	cable 0,15 m	Bracket	3 screws	3 bolts	4 bolts	Connectors	Deutsch DT	AMP SuperSeal 1,5	H9-H11
	2000 lm	1500 lm	1000 lm																		
CRC5K.54828	✓				✓			✓	✓		✓									✓	
CRC5K.54820	✓				✓			✓	✓		✓				✓						✓
CRC5H.53320	✓					✓		✓	✓		✓										
CRC5H.53325	✓					✓		✓	✓		✓		✓								
CRC5H.53326	✓					✓		✓	✓		✓		✓			✓					
CRC5H.53328	✓					✓		✓	✓							✓				✓	
CRC5H.53321	✓					✓		✓	✓		✓	✓					✓				
CRC5D.51620		✓				✓		✓	✓		✓	✓			✓						
CRC5D.51625		✓				✓		✓	✓		✓		✓						✓		
CRC5D.51623		✓				✓		✓	✓		✓				✓				✓		
CRC5D.51627		✓				✓		✓	✓		✓				✓					✓	
CRC5D.51622		✓				✓		✓	✓		✓	✓				✓					

Cat. number	Luminous flux			Beam angle	35°	58°	IP rating	IP67	IP69K	Accessories	LED module 12V/24V	cable 0,5 m	cable 0,15 m	Bracket	3 screws	3 bolts	4 bolts	Connectors	Deutsch DT	AMP SuperSeal 1,5	H9-H11
	2000 lm	1500 lm	1000 lm																		
CRC5D.51626		✓				✓		✓	✓		✓		✓						✓		
CRC5D.51624		✓				✓		✓	✓		✓										
CRC5D.51628		✓				✓		✓	✓		✓						✓			✓	
CRC5D.51621			✓			✓		✓	✓		✓						✓				
CRC5C.51520			✓			✓		✓	✓		✓	✓									
CRC5C.51525			✓			✓		✓	✓		✓		✓						✓		
CRC5C.51523			✓			✓		✓	✓		✓								✓		
CRC5C.51527			✓			✓		✓	✓		✓									✓	
CRC5C.51522			✓			✓		✓	✓		✓								✓		
CRC5C.51524			✓			✓		✓	✓		✓								✓		
CRC5C.51526			✓			✓		✓	✓		✓		✓						✓		
CRC5C.51528			✓			✓		✓	✓		✓									✓	
CRC5C.51521			✓			✓		✓	✓		✓	✓					✓				