



TECHNICAL DATA / FEATURES

- dimensions: $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 58°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP SuperSeal 1.5, Deutsch DT
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess.



It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

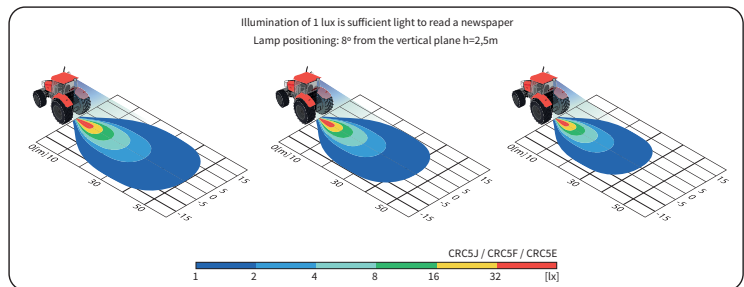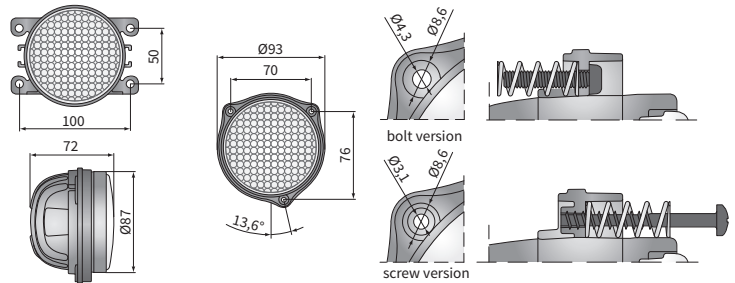

Cat. number	Luminous flux			Beam angle	IP rating	Accessories			Connectors	Deutsch DT	AMP SuperSeal 1,5	H9-H11
	2000 lm	1500 lm	1000 lm			cable 0,5 m	cable 0,15 m	Bracket				
CRC5J.53421	✓			35°	✓							
CRC5J.53428	✓			58°	✓							
CRC5F.52020		✓			✓			✓				
CRC5F.52022		✓			✓			✓				
CRC5F.52021		✓			✓				✓			
CRC5F.52023		✓			✓			✓		✓		
CRC5F.52024		✓			✓					✓		
CRC5F.52025		✓			✓			✓		✓		
CRC5F.52026		✓			✓				✓			
CRC5F.52027		✓			✓			✓		✓		
Cat. number	Luminous flux			Beam angle	IP rating	Accessories			Connectors	Deutsch DT	AMP SuperSeal 1,5	H9-H11
	2000 lm	1500 lm	1000 lm			cable 0,5 m	cable 0,15 m	Bracket				
CRC5F.52028		✓		35°	✓							
CRC5E.51920			✓		✓			✓			✓	
CRC5E.51922			✓		✓							
CRC5E.51921			✓		✓							
CRC5E.51923			✓		✓							
CRC5E.51924			✓		✓							
CRC5E.51925			✓		✓							
CRC5E.51926			✓		✓							
CRC5E.51927			✓		✓							
CRC5E.51928			✓		✓							