

luminous flux:	2000 lm	1500 lm
maximum power:	22W	18W
rated voltage:	12÷24V DC	
permissible voltage:	10,5÷30V DC	
current at 13,2V:	1,6A	1,1A
current at 28V:	0,9A	0,6A
maximum current:	1,6A	1,1A
colour temperature:	6000÷6500K	5000÷5500K
beam:	wide	
beam angle:	60°	
IP rating:	IP67, IP69K, IP66	
work temperature:	-40°C ÷ 80°C	
housing's material:	aluminium	
lens' material:	plastic	
corrosion resistance:	ISO 9227, 500h	
vibration resistance:	15,3G 24÷2000Hz	
EMC Class CISPR 25:	V	
built-in connectors:	Deutsch DT, AMP Faston 250, AMP SuperSeal 1,5	
other:	protection: - against overheating - against reverse polarisation	



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.


The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence. Correct polarity required.

Mounting: as a freestanding on body panels. They shall be installed on a vehicle in horizontal position, as left-side or right-side mounted.

The bracket parts are made of Inox steel. Different colours of the frame are available: i.e. red, yellow (option).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
Deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

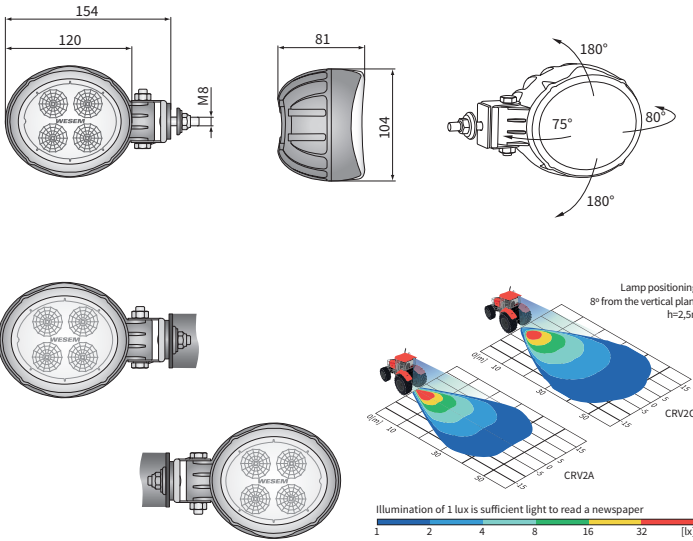

Cat. number	Luminous flux		Colour temperature	6000÷6500K	5000÷5500K	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V/24V	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
	2000 lm	1500 lm																		
CRV2C.56140	✓			✓				✓	✓		✓	✓								
CRV2C.56147	✓			✓				✓	✓		✓						✓			2
CRV2A.49640		✓			✓			✓	✓		✓	✓								
CRV2A.49641		✓			✓			✓	✓		✓	✓		✓						
CRV2A.49646		✓			✓		✓		✓		✓					✓				2
CRV2A.49647		✓			✓			✓	✓		✓						✓			2
CRV2A.49649		✓			✓			✓	✓		✓							✓		2