

light functions:	reversing light		
function markings:	AR		
luminous flux:	2400 lm	1600 lm	800 lm
maximum power:	27W	22W	11W
rated voltage:	12÷24V DC		
permissible voltage:	10,5÷30V DC		
current at 13,2V:	2,2A	1,4A	0,7A
current at 28V:	1,1A	0,7A	0,4A
maximum current:	2,2A	1,4A	0,7A
colour temperature:	4500÷5000K		
beam angle:	50° x 30°		
IP rating:	IP67, IP69K		
work temperature:	-40°C ÷ 80°C		
housing's material:	aluminium		
lens' material:	plastic		
corrosion resistance:	ISO 9227, 500h		
vibration resistance:	15,3G 24÷2000Hz		
EMC Class CISPR 25:	V		
built-in connectors:	Deutsch DT, AMP SuperSeal 1,5		
other:	protection: - against overheating - against reverse polarisation		



Particularly recommended for trucks and vans.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.


They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).


Useful parts while installing:

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

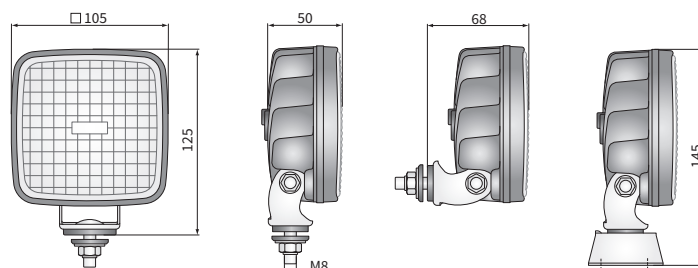

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane h=2,5m

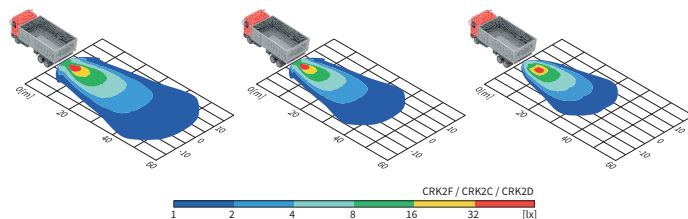

Cat. number	Homologation code	Luminous flux	Rated power	IP rating	Type	housing	Accessories	Connectors	Bracket	Packaging / pc
CRK2F.57300	112	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2F.57340	112	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2F.57350	112	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54900	104	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54940	104	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54950	104	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54960	104	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54970	104	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54980	104	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2D.55700	107	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2D.55750	107	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2D.55770	107	✓	✓	✓	✓	✓	✓	✓	✓	1