

light functions:	reversing light	
function markings:	AR	
luminous flux:	2000 lm	1300 lm
maximum power:	20W	13W
rated voltage:	12÷24V DC	
permissible voltage:	10,5÷30V DC	
current at 13,2V:	1,4A	1A
current at 28V:	0,7A	0,5A
maximum current:	2,8A	1,3A
colour temperature:	6000÷6500K	5500÷6000K
beam angle:	43° x 34°	
IP rating:	IP67, IP69K	
work temperature:	-40°C ÷ 80°C	
housing's material:	aluminium	
lens' material:	plastic	
corrosion resistance:	ISO 9227, 500h	
vibration resistance:	15,3G 24÷2000Hz	
EMC Class CISPR 25:	III	
built-in connectors:	Deutsch DT, AMP SuperSeal 1,5	
other:	protection: - against overheating - against reverse polarisation	



Particularly recommended for trucks and vans.

The lamps comply with EMC Directive 2004/108/EC.

They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.



They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).


Useful parts while installing:

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

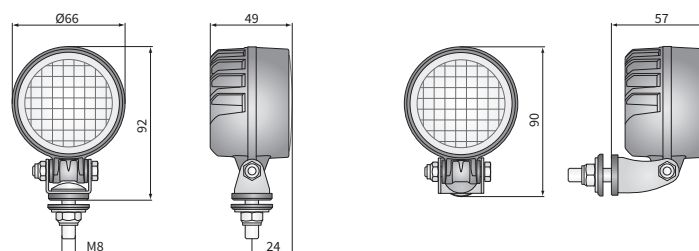

Illumination of 1 lux is sufficient light to read a newspaper
Lamp positioning: 8° from the vertical plane, h=1m

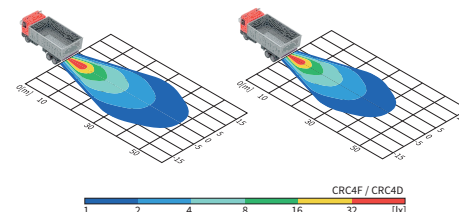

Cat. number	Homologation code	Luminous flux	Rated power	Type	IP rating	Type of bracket	Accessories	Connectors	Packaging / pc	carton box
CRC4F.59400	118	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4F.59430	118	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4F.59450	118	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4F.59460	118	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4D.59200	117	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4D.59230	117	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4D.59250	117	✓	✓	✓	✓	✓	✓	✓	1	1
CRC4D.59260	117	✓	✓	✓	✓	✓	✓	✓	1	1