light functions:	maneuvering
function markings:	ML
luminous flux:	2200 lm
maximum power:	15W
rated voltage:	12÷24V DC
permissible voltage:	10,5÷30V DC
current at 13,2V:	1,1A
current at 28V:	0,6A
maximum current:	1,7A
colour temperature:	5500÷6000K
beam angle:	100°
IP rating:	IP67, IP69K
work temperature:	-40°C ÷ 80°C
housing's material:	aluminium
lens' material:	plastic
corrosion resistance:	ISO 9227, 500h
vibration resistance:	15,3G 24÷2000Hz
EMC Class CISPR 25:	III
other:	protection: - against overheating - against reverse polarisation






They are used to illuminate the maneuvering area around trucks, trailers, semi-trailers, special and commercial vehicles.

They are approved as manoeuvring lamps (ML) in accordance with Regulation R148.

The lamps comply with EMC Directive 2004/108/EC.
They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.

It is possible to install needed connectors on wire (on request).

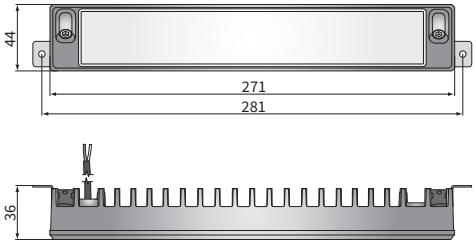



Cat. number	Homologation code	Luminous flux	2200 lm	IP rating	IP67	IP69K	Housing	black	white	red	amber	Accessories	LED module 12V-24V	cable 0,5 m	Connectors	Deutsch DT	AMP SuperSeal 1,5	Packaging / pc	carton box
CRP1D.59150	121		✓		✓	✓		✓					✓	✓					1