



## TECHNICAL DATA / FEATURES

- dimensions:  $\phi 84 \times 97$
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: FF
- light distribution angle:  $40^\circ \times 22^\circ$
- IP rating: IP66, IP69K
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT



## ADDITIONAL INFORMATION

Universal lamps dedicated for small recesses or in places with limited space for installation.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.


Versions with the bracket can be installed on a vehicle in an upright or upside-down position.

It is possible to install needed connectors on wire (on request).

Useful parts while installing:

- AMP Faston 250 plug 2-pin - cat. No. A.07138
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

## DIMENSIONS

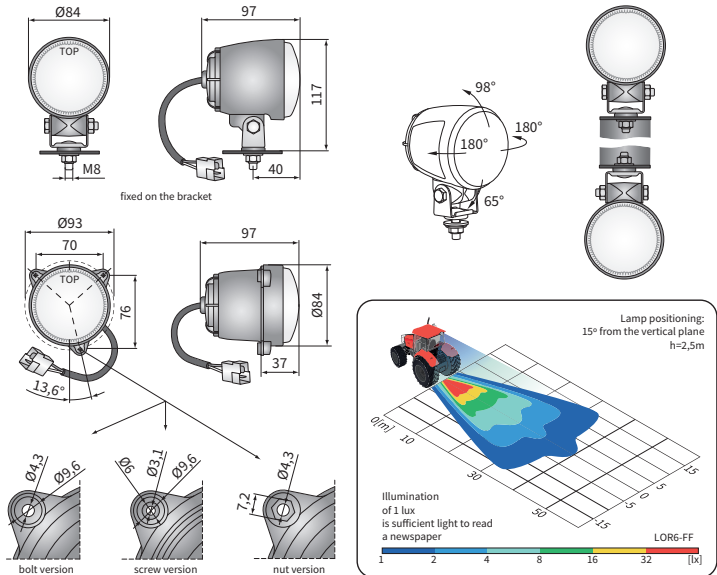

Cat. number	Hella Catal. No.	Cobo Catal. No.	IP rating		Accessories			Mounting method			Connectors			Packaging / pc	
			IP66	IP69K	bulb H3 12V	bulb H3 24V	cable 0,2 m	in recess	installed vertically up	suspended	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	carton box
<b>LOR6.41557</b>	1G0 996 176-111	05.1190.0000	✓	✓										2	1
<b>LOR6.41558</b>			✓	✓	✓									2	1
<b>LOR6.41551</b>	1G0 996 176-001		✓	✓			✓							2	1
<b>LOR6.41552</b>			✓	✓	✓		✓							2	1
LOR6.41584			✓	✓		✓								2	1
<b>LOR6.41553</b>			✓	✓	✓		✓							2	1
LOR6.41556			✓	✓		✓	✓							2	1
<b>LOR6.41571</b>	1G0 996 176-021		✓	✓				✓			✓			2	1
LOR6.41572			✓	✓	✓			✓			✓			2	1
LOR6.41561	1G0 996 176-021		✓	✓			✓				✓			2	1
<b>LOR6.41562</b>			✓	✓	✓		✓				✓			2	1
<b>LOR6.41567</b>			✓	✓	✓		✓				✓			2	1
LOR6.41586			✓	✓	✓		✓				✓			2	1
LOR6.41585			✓	✓	✓		✓				✓			2	1
<b>LOR6.41542</b>			✓	✓	✓		✓				✓			2	1
<b>LOR6.41564</b>			✓	✓	✓		✓				✓			2	1
LOR6.41576			✓	✓	✓		✓				✓			2	1