



TECHNICAL DATA / FEATURES

- dimensions: $\phi 139/131 \times 75$, $\phi 150/142 \times 77$
- light functions: passing, driving, position
- function markings: C/R, A, HC/R
- traffic: right-hand
- reference mark: 12.5/7.5, 12.5/10
- source of light: H4, R2, W5W
- maximum power: 75/70W, 55/50W, 5W
- nominal voltage: 12V-24V DC
- optics: FF
- IP rating: IP54, IP66
- housing's material: plastic
- lens' material: glass
- built-in connectors: -
- other (optional): mounting plate
levelling system



ADDITIONAL INFORMATION

To be mounted in factory designed locations or in the front bumper recesses.

Approved to be used with H4 and R2 type bulbs.

IP66 rated for versions with hermetic main bulb holder.

Useful parts while installing:

- hermetic main bulb holder - cat. No. A.26925
- main bulb mounting block - cat. No. A.07128


Replacement parts:

- main bulb gasket - cat. No. A.05820
- electric levelling unit $\phi 6$ long - cat. No. A.09050
- hermetic position bulb holder - cat. No. A.26910

Dedicated application:



A - Pasagon light trucks (since 2011)

DIMENSIONS

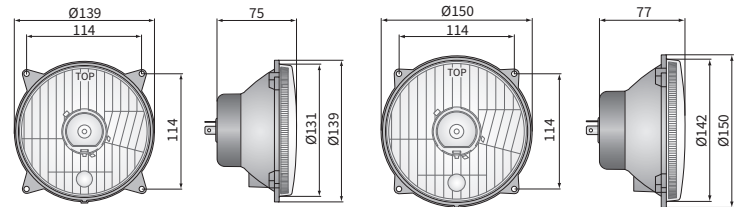

PES3.42262

PES2.42005
PES3.42025

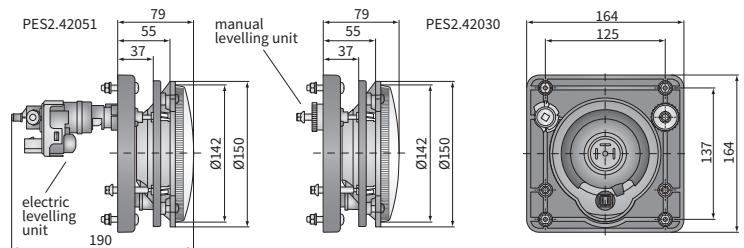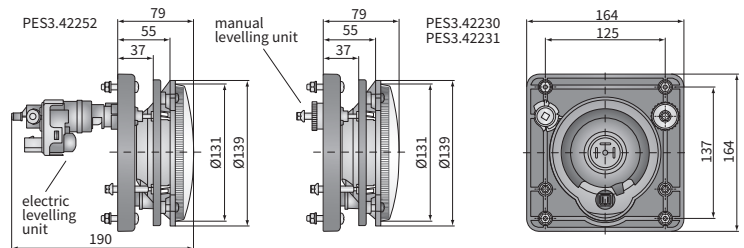

Cat. number	Homologation code	Dimensions $\phi 139/131 \times 75$ $\phi 150/142 \times 77$	Light functions passing driving position	Accessories bulb H4 12V bulb W5W mounting plate-levelling unit bulb gasket bulb holder IP66 electric levelling unit manual levelling unit AMP SuperSeal conn.	Application universal dedicated
PES3.42230	051	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES3.42231	051	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES3.42234	051	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES3.42252	051	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES3.42262	051	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES2.42030	050	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES2.42051	050	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓ A
PES2.42005	050	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓
PES2.42025	050	✓	✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓