


dimensions:	172x142x77				
light functions:	passing	driving	position	passing	driving
function markings:	C/R		A	HC/R	
traffic:	right-hand				
reference mark:	-	12,5	-	17,5	
source of light:	R2		T4W	H4	
maximum power:	55/50W		4W	75/70W	
rated voltage:	12÷24V DC				
optics:	standard				
IP rating:	IP54				
housing's material:	plastic				
lens' material:	glass				





Particularly recommended for tractors and slow-moving vehicles.
To be mounted in factory designed locations or in the front bumper recesses.

Useful parts while installing:
main bulb gasket - cat. No. A.05820
position light bulb holder - cat. No. A.05921
main bulb mounting block - cat. No. A.07128

Dedicated application:
A - tractors:
Case IH: 433, 743, 745
Fendt: 360, 365, 380, 390, 395
Fendt Farmer: 303-312
Fendt Favorit: 610, 611, 612, 614, 615, 626
Zetor: 4340, 5320, 6320, 7340 (until 1999)
- slow-moving vehicle Atlas 1404
B - tractors:
Case IH: 383, 423, 453, 554, 644, 744, 844, 846, 1046, 1246
Fendt: 1Z, 1E, 1D, 2DE, 2E, 2S, FIX 2
Fendt Farmer: 102-108, 200-205
Steyr: 8060, 8070, 8080, 8100, 8120, 8140, 8160
Mercedes-Benz: MB-Trac: 700, 800, 900, 1000, 1100, 1300, 1500

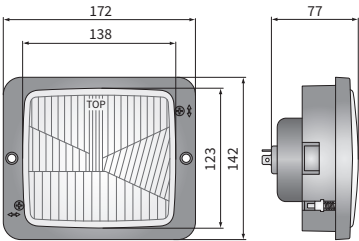


A.05820

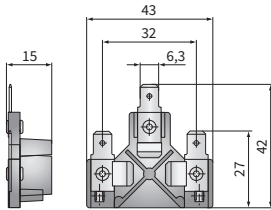

A.07128

A.05921



Cat. number	Hella Catal. No.	Homologation code	Light functions			Type	R2	H4	Reference mark	12,5	17,5	Accessories	frame	bulb gasket	Side	right	left	Application	dedicated	Packaging / pc	carton box
			passing	driving	position																
RE.22788	1AA 004 109-001	012	✓	✓			✓			✓			✓	✓	✓	✓	✓	A	A	1	1
RE.22778	1AA 004 109-031	012	✓	✓	✓		✓			✓			✓	✓	✓	✓	✓	A	A	1	1
RE.22779	1AB 001 100-001	012	✓	✓	✓		✓			✓			✓	✓	✓	✓	✓	B	B	1	1
RE.22889	1AA 004 109-021	009	✓	✓				✓			✓		✓	✓	✓	✓	✓	A	A	1	1
RE.22879	1AA 004 109-041	009	✓	✓	✓			✓			✓		✓	✓	✓	✓	✓	A	A	1	1
RE.22780		009	✓	✓	✓			✓			✓		✓	✓	✓	✓	✓			1	1