



TECHNICAL DATA / FEATURES

- dimensions: 68x68x70, 68x68x49
- luminous flux of the LED module: 2000 lm, 1300 lm
- luminous flux of the lamp: 1600 lm, 1040 lm
- maximum power: 20W, 13W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 1 x LED, 3 x LED
- colour temperature: 4700-5700K
- light distribution angle: 43° x 34°, 100°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).




It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

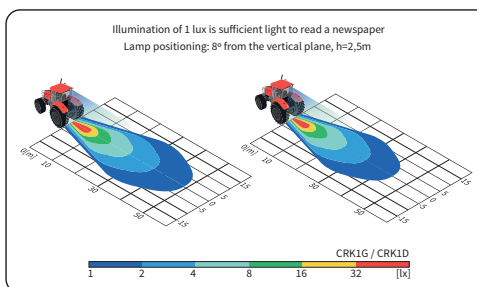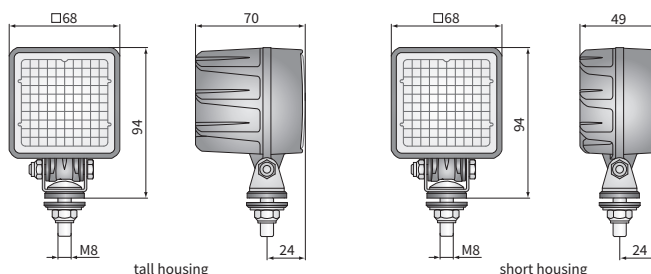

Cat. number	Luminous flux		Rated power		Beam angle		IP rating		Bracket		Accessories			Connectors	
	2000 lm	1300 lm	20W	13W	43° x 34°	100°	IP67	IP69K	M8	LED module 12V-24V	cable 0.5 m	short housing	Deutsch DT	AMP SuperSeal 1.5	
CRK1G.60000	✓		✓		✓		✓	✓	✓	✓	✓				
CRK1G.60050	✓		✓		✓		✓	✓	✓	✓	✓		✓		
CRK1G.60060	✓		✓		✓		✓	✓	✓	✓	✓			✓	
CRK1H.60100	✓		✓			✓	✓	✓	✓	✓	✓	✓			
CRK1H.60150	✓		✓			✓	✓	✓	✓	✓	✓		✓		
CRK1H.60160	✓		✓			✓	✓	✓	✓	✓	✓			✓	
CRK1D.59700		✓		✓	✓		✓	✓	✓	✓	✓	✓			
CRK1D.59750		✓		✓	✓		✓	✓	✓	✓	✓	✓		✓	
CRK1D.59760		✓		✓	✓		✓	✓	✓	✓	✓	✓		✓	
CRK1E.59800		✓		✓		✓	✓	✓	✓	✓	✓	✓	✓		
CRK1E.59850		✓		✓		✓	✓	✓	✓	✓	✓	✓	✓		
CRK1E.59860		✓		✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	