

TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm
- maximum power: 30W, 29W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 6°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION



The bracket parts are made of Inox steel.
It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

The bracket parts are made of Inox steel.
It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

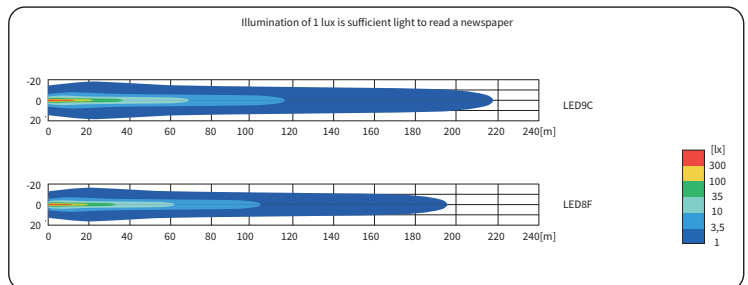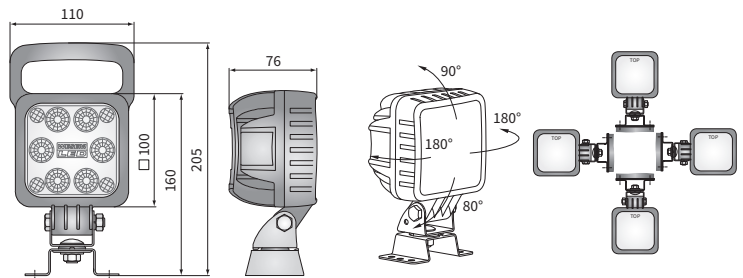

Cat. number	Luminous flux				IP rating	Accessories	Connectors						
	3000 lm	2500 lm	2000 lm	1500 lm			AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin			
LED9C.53920	✓				IP66	LED module 12V-24V	omega bracket	handle	switch				
LED9C.53982	✓				IP67	LED module 12V-48V	omega bracket	handle	switch				
LED9C.53926	✓				IP69K	LED module 12V-24V	omega bracket	handle	switch	AMP Faston 250			2
LED9C.53927	✓				IP66	LED module 12V-48V	omega bracket	handle	switch	Deutsch DT			2
LED9C.53928	✓				IP66	LED module 12V-24V	omega bracket	handle	switch		AMP SuperSeal 1,5		2
LED9C.53930	✓				IP66	LED module 12V-24V	omega bracket	handle	switch				
LED9C.53983	✓				IP66	LED module 12V-48V	omega bracket	handle	switch				
LED9C.53936	✓				IP66	LED module 12V-24V	omega bracket	handle	switch	AMP Faston 250			2
LED9C.53937	✓				IP66	LED module 12V-48V	omega bracket	handle	switch	Deutsch DT			2
LED8F.51020		✓			IP66	LED module 12V-24V	omega bracket	handle	switch				
LED8F.51082		✓			IP66	LED module 12V-48V	omega bracket	handle	switch				
LED8F.51026		✓			IP66	LED module 12V-24V	omega bracket	handle	switch	AMP Faston 250			2
LED8F.51027		✓			IP66	LED module 12V-48V	omega bracket	handle	switch	Deutsch DT			2
LED8F.51028		✓			IP66	LED module 12V-24V	omega bracket	handle	switch		AMP SuperSeal 1,5		2
LED8F.51030		✓			IP66	LED module 12V-24V	omega bracket	handle	switch				
LED8F.51083		✓			IP66	LED module 12V-48V	omega bracket	handle	switch				
LED8F.51036		✓			IP66	LED module 12V-24V	omega bracket	handle	switch	AMP Faston 250			2
LED8F.51037		✓			IP66	LED module 12V-48V	omega bracket	handle	switch	Deutsch DT			2




TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 25W, 19W
- nominal voltage: 12V-24V DC, 12V-48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 6°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

DIMENSIONS

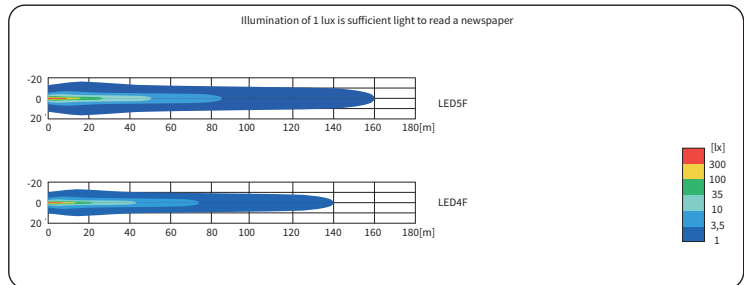

Cat. number	Luminous flux				IP rating	Accessories	Connectors
	3000 lm	2500 lm	2000 lm	1500 lm			
LED5F.47920			✓		IP66	LED module 12V-24V	AMP Faston 250
LED5F.47982			✓		IP67	LED module 12V-48V	Deutsch DT
LED5F.47926			✓		IP69K	omega bracket	AMP SuperSeal 1.5
LED5F.47927			✓			handle	Cap / Pin
LED5F.47928			✓			cable 0,5 m	
LED5F.47930			✓			switch	
LED5F.47983			✓				
LED5F.47936			✓				
LED5F.47937			✓				
LED4F.47820			✓				
LED4F.47882			✓				
LED4F.47826			✓				
LED4F.47827			✓				
LED4F.47828			✓				
LED4F.47830			✓				
LED4F.47883			✓				
LED4F.47836			✓				
LED4F.47837			✓				
LED4F.47860			✓				
LED4F.47886			✓				
LED4F.47866			✓				
LED4F.47867			✓				
LED4F.47868			✓				
LED4F.47870			✓				
LED4F.47887			✓				
LED4F.47876			✓				
LED4F.47877			✓				