

LED-FF 6° work lamps with other holders



TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm, 2000 lm, 1500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm, 1600 lm, 1200 lm
- maximum power: 30W, 29W, 25W, 24W
- nominal voltage: 12V-24V DC, 48V DC
- permissible power supply voltage: 10.5V-30V DC, 40-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 28° x 28°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: -
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION



Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Replacement parts:
 neodymium magnet $\phi 89/500N$ (1 pc.) - cat. No. CAR4.51320

DIMENSIONS

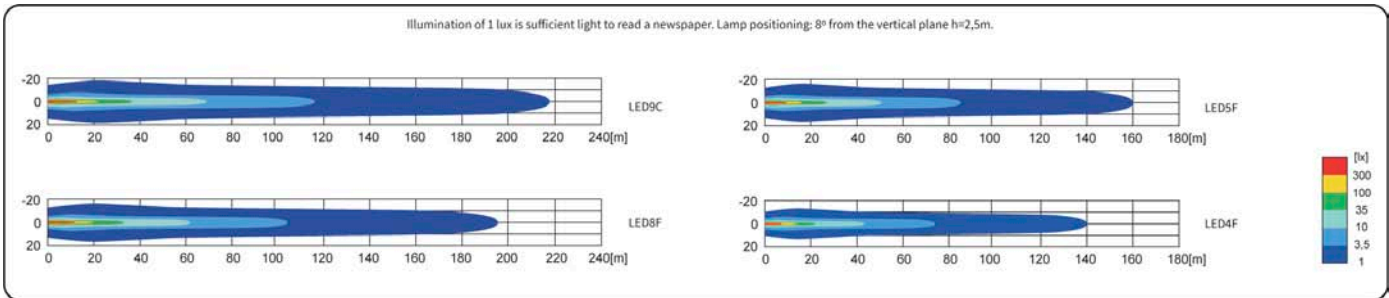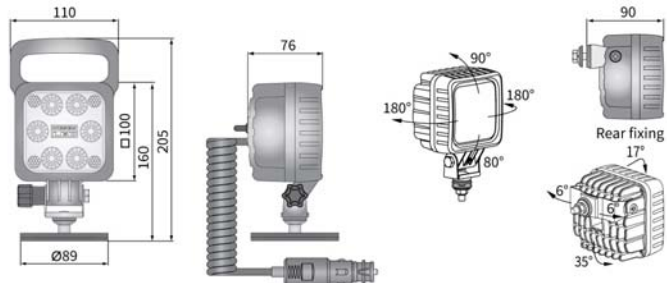

Cat. number	Luminous flux				IP rating	Mounting	neodymium magnet	CAR1 holder	rear	Accessories	LED module 12V-24V	LED module 48V	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
	3000 lm	2500 lm	2000 lm	1500 lm																		
LED9C.53994	✓				✓	✓	✓			✓												
LED9C.53995	✓				✓	✓	✓			✓												
LED9C.53925	✓				✓	✓	✓		✓	✓												
LED8F.51094		✓			✓	✓	✓			✓												
LED8F.51095		✓			✓	✓	✓			✓												
LED8F.51025		✓			✓	✓	✓		✓	✓												
LED5F.47994			✓		✓	✓	✓			✓												
LED5F.47995			✓		✓	✓	✓			✓												
LED5F.47925			✓		✓	✓	✓		✓	✓												
LED4F.47890				✓	✓	✓	✓			✓												
LED4F.47891				✓	✓	✓	✓			✓												
LED4F.47825				✓	✓	✓	✓		✓	✓												
LED4F.47888				✓	✓	✓	✓			✓												
LED4F.47889				✓	✓	✓	✓			✓												