

TECHNICAL DATA / FEATURES

- dimensions: $\phi 66 \times 49, \phi 66 \times 69$
- luminous flux of the LED module: 800 lm
- luminous flux of the lamp: 600 lm
- maximum power: 12W
- nominal voltage: 12V-24V DC, 12V-48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC
- source of light: 2 x LED
- colour temperature: 4700-5700K
- light distribution angle: $43^\circ \times 34^\circ$
- IP rating: IP67, IP69K
- work temperature: $-40^\circ\text{C} - +80^\circ\text{C}$
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.




Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
 deutsch plug DT06-2S 2-pin - cat. No. A.07135
 AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

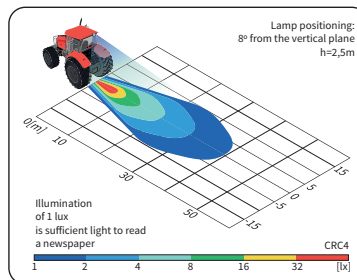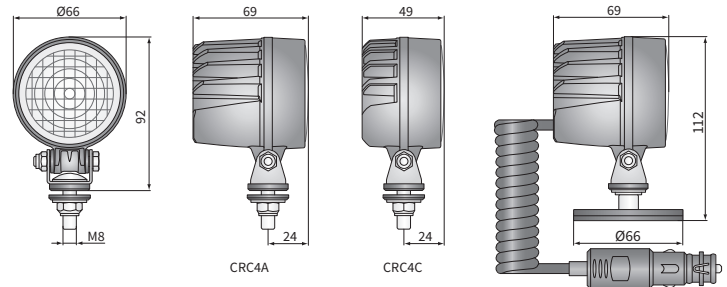

| Cat. number | Hella Catal. No. | Luminous flux | | Rated power | | IP rating | | Accessories | Bracket | | Connectors | |
|-------------|---------------------|---------------|-----|-------------|-------|-----------|-----------------|-------------|------------|-------------------|------------|---|
| | | 800 lm | 12W | IP67 | IP69K | M8 | neodymium magn. | | Deutsch DT | AMP SuperSeal 1.5 | Cap / Pin | |
| CRC4C.57900 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| CRC4A.51100 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| CRC4A.51150 | 1G0 995 050-001,011 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | 2 |
| CRC4A.51160 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | 2 |
| CRC4A.51180 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | |
| CRC4B.55000 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| CRC4B.55050 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | 2 |
| CRC4B.55060 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | 2 |
| CRC4B.55080 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | |