



**TECHNICAL DATA / FEATURES**

- dimensions:  $\phi 66 \times 69, \phi 66 \times 49$
- luminous flux of the LED module: 2000 lm, 1300 lm
- luminous flux of the lamp: 1600 lm, 1040 lm
- maximum power: 20W, 13W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 1 x LED, 3 x LED
- colour temperature: 4700-5700K
- light distribution angle:  $43^\circ \times 34^\circ, 100^\circ$
- IP rating: IP67, IP69K
- work temperature:  $-40^\circ\text{C} - +80^\circ\text{C}$
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
  - against overheating
  - against reverse polarisation
 bracket made of Inox steel



**ADDITIONAL INFORMATION**

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).




It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

Deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

**DIMENSIONS**

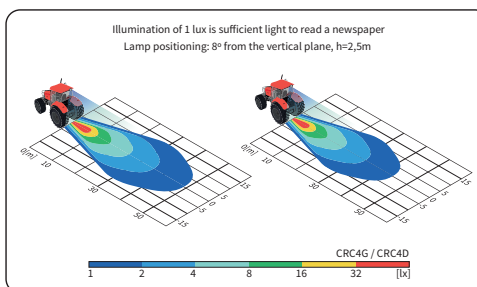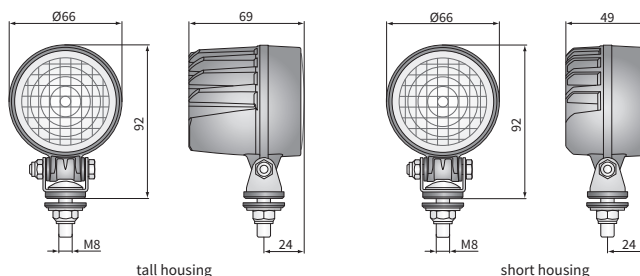

Cat. number	Hella Catal. No.	Luminous flux		Rated power		Beam angle		IP rating		Bracket		Accessories		Connectors	
		2000 lm	1300 lm	20W	13W	$43^\circ \times 34^\circ$	$100^\circ$	IP67	IP69K	M8	LED module 12V-24V	cable 0,5 m	short housing	Deutsch DT	AMP SuperSeal 1.5
<b>CRC4G.59500</b>		✓		✓		✓		✓	✓	✓		✓			
CRC4G.59550		✓		✓		✓		✓	✓	✓		✓		✓	
CRC4G.59560		✓		✓		✓		✓	✓	✓		✓		✓	
<b>CRC4H.59600</b>		✓		✓		✓	✓	✓	✓	✓		✓	✓		
CRC4H.59650		✓		✓		✓	✓	✓	✓	✓		✓		✓	
CRC4H.59660		✓		✓		✓	✓	✓	✓	✓		✓		✓	
<b>CRC4D.59200</b>			✓		✓	✓		✓	✓	✓		✓	✓		
CRC4D.59250	1G0 995 050-001,011		✓		✓	✓		✓	✓	✓		✓	✓	✓	
CRC4D.59260			✓		✓	✓		✓	✓	✓		✓	✓	✓	
<b>CRC4E.59300</b>			✓		✓	✓	✓	✓	✓	✓		✓	✓		
CRC4E.59350			✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	
CRC4E.59360			✓		✓	✓	✓	✓	✓	✓		✓	✓	✓	✓