



TECHNICAL DATA / FEATURES

- dimensions: $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 35°, 58°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

They can be installed in any position (standing, hanging, on side).

Useful parts while installing:


- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

Dedicated application:


A - tractors Valtra series:

- A4: A74, A84, A94, A104, A114, A124, A134,
- G5: G105, G115, G125, G135,
- N4: N104, N114E, N124, N134, N154E, N174,
- N5: N135, N155E, N175,
- T4: T144, T154, T174E, T194, T214, T234,
- T5: T145, T155, T175E, T195, T215, T235, T255

DIMENSIONS

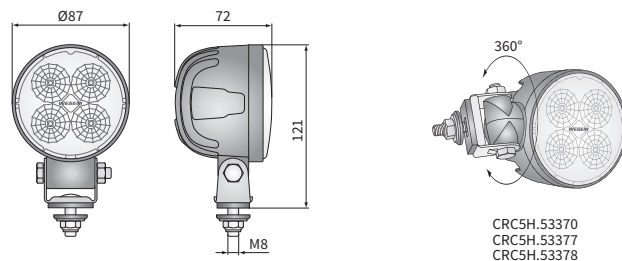

CRC5H.53370
CRC5H.53377
CRC5H.53378

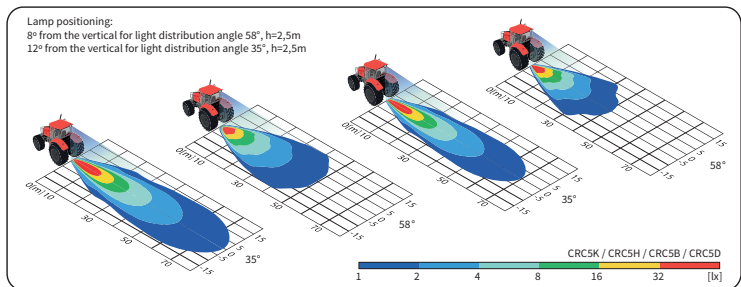

Cat. number	Luminous flux			Beam angle		IP rating	Accessories			Connectors	Application dedicated
	2000 lm	1500 lm	1000 lm	35°	58°		handle	0.5 m cable	0.15 m cable		
CRC5K.54801	✓	✓	✓	✓	✓	IP66	✓	✓	✓	AMP Faston 250	
CRC5K.54806	✓	✓	✓	✓	✓	IP67	✓	✓	✓	Deutsch DT	
CRC5K.54814	✓	✓	✓	✓	✓	IP69K	✓	✓	✓	AMP SuperSeal 1,5	
CRC5K.54815	✓	✓	✓	✓	✓		✓	✓	✓		H9-H11
CRC5K.54803	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53301	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53370	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53306	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53314	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53377	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53378	✓	✓	✓	✓	✓		✓	✓	✓		A
CRC5H.53315	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5H.53303	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5B.50001	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5B.50006	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5B.50014	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5B.50002	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5B.50015	✓	✓	✓	✓	✓		✓	✓	✓		

Cat. number	Luminous flux			Beam angle		IP rating	Accessories			Connectors	Application dedicated
	2000 lm	1500 lm	1000 lm	35°	58°		handle	0.5 m cable	0.15 m cable		
CRC5D.51601	✓	✓	✓	✓	✓	IP66	✓	✓	✓	AMP Faston 250	
CRC5D.51609	✓	✓	✓	✓	✓	IP67	✓	✓	✓	Deutsch DT	
CRC5D.51606	✓	✓	✓	✓	✓	IP69K	✓	✓	✓	AMP SuperSeal 1,5	
CRC5D.51614	✓	✓	✓	✓	✓		✓	✓	✓		H9-H11
CRC5D.51602	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5D.51615	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5A.49401	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5A.49406	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5A.49414	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5A.49402	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5A.49415	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5C.51501	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5C.51504	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5C.51506	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5C.51514	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5C.51502	✓	✓	✓	✓	✓		✓	✓	✓		
CRC5C.51515	✓	✓	✓	✓	✓		✓	✓	✓		