



**TECHNICAL DATA / FEATURES**

- dimensions:  $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 35°, 58°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: -
- other: protection:
  - against overheating
  - against reverse polarisation



**ADDITIONAL INFORMATION**

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).


Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:

- neodymium magnet  $\phi 66/230N$  (1 pc.) - cat. No. CAR4.51315
- brackets - cat. No. CAR2.41910
- grip - cat. No. AR.54324
- suction cup holder d87 - cat. No. CAR5.55600

**DIMENSIONS**

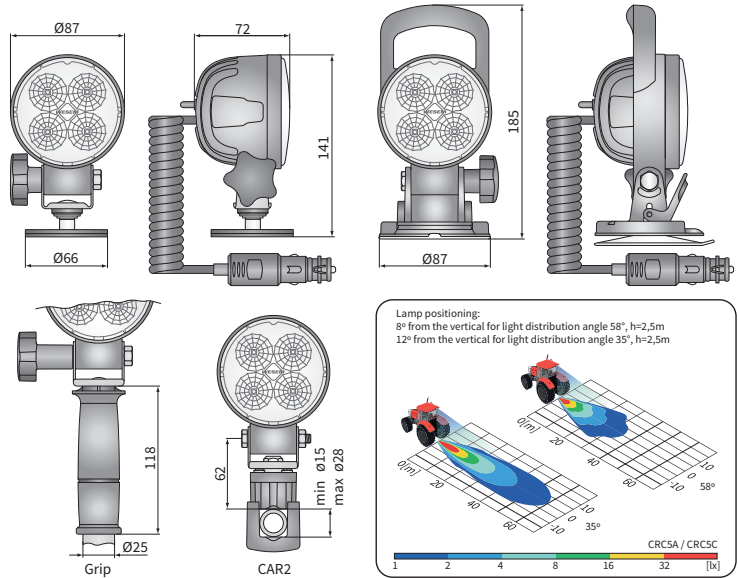

Cat. number	Luminous flux			Beam angle	Accessories	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	case	Bracket	omega	neodymium magn.	CAR2	grip	suction cup	Connectors	Deutsch DT	AMP SuperSeal 1,5	
	2000 lm	1500 lm	1000 lm																		
CRC5K.54853	✓			✓																	
CRC5K.54854	✓			✓																	
CRC5K.54856	✓			✓																	
CRC5K.54859	✓			✓																	
CRC5K.54857	✓			✓													✓				
CRC5K.54858	✓			✓												✓					
CRC5H.53352	✓			✓																	
CRC5H.53353	✓			✓																	
<b>CRC5H.53356</b>	✓			✓																	
<b>CRC5H.53359</b>	✓			✓																	
CRC5B.50021		✓		✓			✓							✓							
CRC5B.50053		✓		✓				✓						✓							
CRC5B.50054		✓		✓				✓						✓							
CRC5B.50056		✓		✓				✓						✓							
CRC5B.50059		✓		✓				✓						✓							

Cat. number	Luminous flux			Beam angle	Accessories	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	case	Bracket	omega	neodymium magn.	CAR2	grip	suction cup	Connectors	Deutsch DT	AMP SuperSeal 1,5	
	2000 lm	1500 lm	1000 lm																		
CRC5D.51610		✓		✓																	
CRC5D.51652		✓		✓																	
CRC5D.51653		✓		✓																	
<b>CRC5D.51656</b>		✓		✓																	
<b>CRC5D.51659</b>		✓		✓																	
CRC5A.49454			✓	✓			✓							✓							✓
CRC5A.49453			✓	✓			✓							✓							
CRC5A.49455			✓	✓			✓							✓							
<b>CRC5A.49456</b>			✓	✓			✓							✓							
<b>CRC5A.49459</b>			✓	✓			✓							✓							
CRC5C.51530			✓	✓			✓							✓							
CRC5C.51552			✓	✓			✓							✓							
CRC5C.51553			✓	✓			✓							✓							
<b>CRC5C.51556</b>			✓	✓			✓							✓							
<b>CRC5C.51559</b>			✓	✓			✓							✓							