



TECHNICAL DATA / FEATURES

- dimensions: $\phi 87 \times 72$
- luminous flux of the LED module: 2000 lm, 1500 lm, 1000 lm
- luminous flux of the lamp: 1600 lm, 1200 lm, 800 lm
- maximum power: 21W, 18W, 14.5W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 35°, 58°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP SuperSeal 1.5, Deutsch DT
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess.



It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

DIMENSIONS

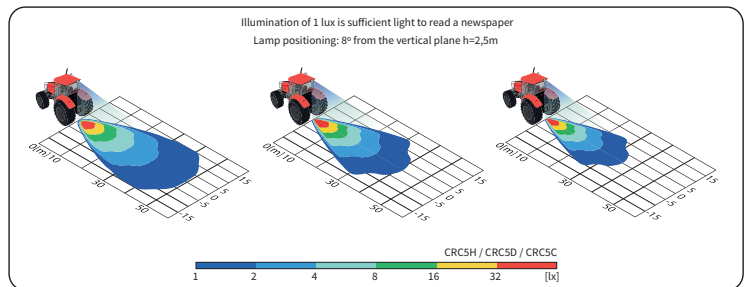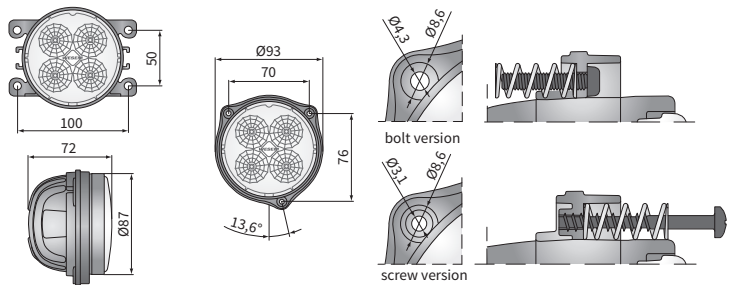

Cat. number	Luminous flux			Beam angle	IP rating	IP67	IP69K	Accessories	Bracket	Connectors
	2000 lm	1500 lm	1000 lm							
CRC5K.54825	✓			35°	58°	✓	✓		3 screws	Deutsch DT
CRC5K.54828	✓			✓	✓	✓		3 bolts	AMP SuperSeal 1,5	
CRC5K.54820	✓			✓	✓	✓		4 bolts		H9-H11
CRC5H.53320	✓			✓	✓	✓	✓			
CRC5H.53325	✓			✓	✓	✓	✓			
CRC5H.53326	✓			✓	✓	✓	✓			
CRC5H.53328	✓			✓	✓	✓	✓			
CRC5H.53321	✓			✓	✓	✓	✓			
CRC5D.51620		✓		✓	✓	✓	✓			
CRC5D.51625		✓		✓	✓	✓	✓			
CRC5D.51623		✓		✓	✓	✓	✓			
CRC5D.51627		✓		✓	✓	✓	✓			
CRC5D.51622		✓		✓	✓	✓	✓			

Cat. number	Luminous flux			Beam angle	IP rating	IP67	IP69K	Accessories	Bracket	Connectors
	2000 lm	1500 lm	1000 lm							
CRC5D.51626		✓		35°	58°	✓	✓		3 screws	Deutsch DT
CRC5D.51624		✓		✓	✓	✓	✓		3 bolts	AMP SuperSeal 1,5
CRC5D.51628		✓		✓	✓	✓	✓		4 bolts	
CRC5D.51621		✓		✓	✓	✓	✓			
CRC5C.51520		✓		✓	✓	✓	✓			
CRC5C.51525		✓		✓	✓	✓	✓			
CRC5C.51523		✓		✓	✓	✓	✓			
CRC5C.51527		✓		✓	✓	✓	✓			
CRC5C.51522		✓		✓	✓	✓	✓			
CRC5C.51524		✓		✓	✓	✓	✓			
CRC5C.51526		✓		✓	✓	✓	✓			
CRC5C.51528		✓		✓	✓	✓	✓			
CRC5C.51521		✓		✓	✓	✓	✓			