



TECHNICAL DATA / FEATURES

- dimensions: 104x120x81
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 22W, 18W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 60°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.

The bracket parts are made of Inox steel.
Different colours of the frame are available: i.e. red, yellow (option).


It is possible to install needed connectors for a version with cable (on request).

- Useful parts while installing:
- deutsch plug DT06-2S 2-pin - cat. No. A.07135
 - AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
 - AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:
neodymium magnet $\phi 89/500N$ (1 pc.) - cat. No. CAR4.51320

Equivalents for Hella:
CRV2A.49600 - 1GM 996 136-361
CRV2A.49610 - 1GM 996 136-311

DIMENSIONS

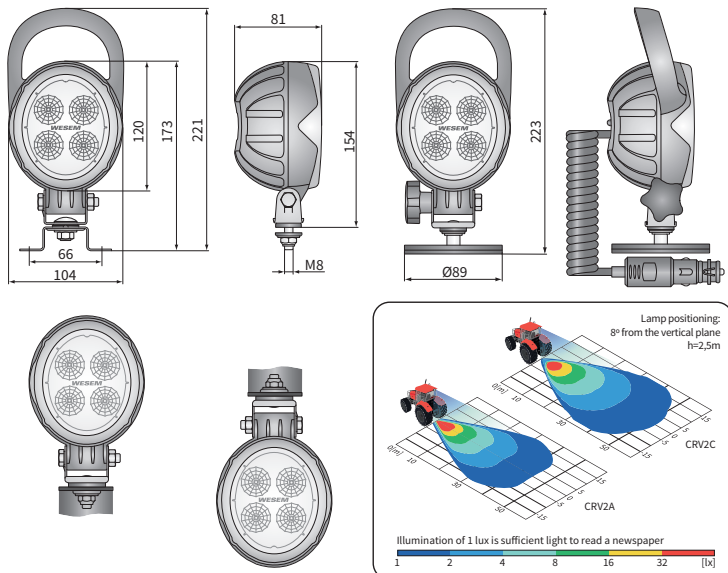

Cat. number	Luminous flux		IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	Bracket	M8	omega	neodymium magn.	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	H9-H11		
	2000 lm	1500 lm																						
CRV2C.56100	✓	✓																						
CRV2C.56106	✓	✓																						
CRV2C.56107	✓	✓		✓	✓	✓																		
CRV2C.56108	✓	✓		✓	✓	✓																		
CRV2C.56103	✓	✓		✓	✓	✓																		
CRV2A.49600		✓		✓	✓	✓																		
CRV2A.49680		✓		✓	✓	✓																		
CRV2A.49606		✓		✓	✓	✓																		
CRV2A.49607		✓		✓	✓	✓																		
CRV2A.49608		✓		✓	✓	✓																		
CRV2A.49610		✓		✓	✓	✓																		
CRV2A.49681		✓		✓	✓	✓																		
CRV2A.49616		✓		✓	✓	✓																		
CRV2A.49617		✓		✓	✓	✓																		

Cat. number	Luminous flux		IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0.5 m	cable 8 m	switch	cigarette lighter plug	Bracket	M8	omega	neodymium magn.	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	H9-H11			
	2000 lm	1500 lm																							
CRV2A.49618		✓		✓	✓	✓																			
CRV2A.49620		✓		✓	✓	✓																			
CRV2A.49682		✓		✓	✓	✓																			
CRV2A.49626		✓		✓	✓	✓																			
CRV2A.49627		✓		✓	✓	✓																			
CRV2A.49629		✓		✓	✓	✓																			
CRV2A.49630		✓		✓	✓	✓																			
CRV2A.49683		✓		✓	✓	✓																			
CRV2A.49636		✓		✓	✓	✓																			
CRV2A.49637		✓		✓	✓	✓																			
CRV2A.49638		✓		✓	✓	✓																			
CRV2A.49684		✓		✓	✓	✓																			
CRV2A.49695		✓		✓	✓	✓																			
CRV2A.49696		✓		✓	✓	✓																			
CRV2A.49697		✓		✓	✓	✓																			