TECHNICAL DATA / FEATURES

dimensions:	ϕ117x74
luminous flux of the LED module:	3000 lm, 2500 lm, 2000 lm, 1500 lm
luminous flux of the lamp:	2400 lm, 2000 lm, 1600 lm, 1200 lm
maximum power:	30W, 29W, 25W, 24W
nominal voltage:	12V-24V DC
permissible power supply voltage:	10.5V-30V DC
source of light:	6 x LED
colour temperature:	5000-7000K
light distribution angle:	50°
IP rating:	IP67, IP69K, IP66
work temperature:	-40°C - +80°C
housing's material:	aluminium/plastic
lens' material:	plastic
built-in connectors:	Deutsch DT, AMP Faston 250, AMP SuperSeal 1.5
other:	protection: • against overheating • against reverse polarisation

ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.
Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

Equipped with removable protective grille.
The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
Deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

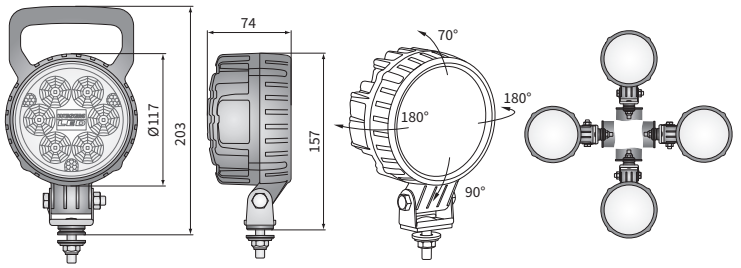

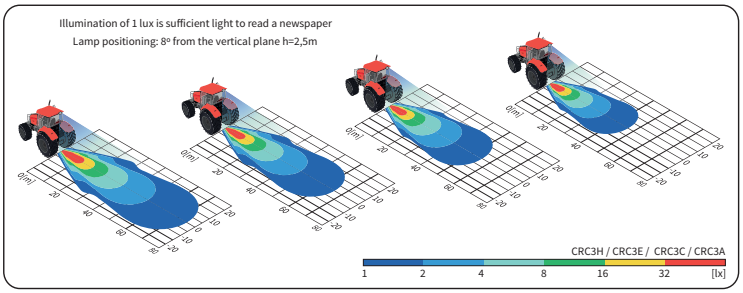

Cat. number	Luminous flux	3000 lm	2500 lm	2000 lm	1500 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0,5 m	cable 8 m	switch	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	HB3	H9-H11
CRC3H.56900		✓						✓	✓		✓		✓								
CRC3H.56907		✓						✓	✓		✓							✓			
CRC3H.56903		✓						✓	✓		✓		✓							✓	
CRC3H.56912		✓						✓	✓		✓		✓								✓
CRC3E.50300			✓					✓	✓		✓		✓								
CRC3E.50380			✓					✓	✓		✓		✓		✓						
CRC3E.50306			✓				✓		✓		✓						✓				
CRC3E.50307			✓					✓	✓		✓							✓			
CRC3E.50308			✓					✓	✓		✓								✓		
CRC3E.50310			✓					✓	✓		✓	✓	✓								
CRC3E.50381			✓					✓	✓		✓	✓	✓		✓						
CRC3E.50316			✓				✓		✓		✓	✓					✓				
CRC3E.50317			✓					✓	✓		✓	✓						✓			
CRC3E.50318			✓					✓	✓		✓	✓							✓		
CRC3C.50100				✓				✓	✓		✓		✓								
CRC3C.50180				✓				✓	✓		✓		✓		✓						
CRC3C.50106				✓			✓		✓		✓						✓				
CRC3C.50107				✓				✓	✓		✓							✓			

Cat. number	Luminous flux	3000 lm	2500 lm	2000 lm	1500 lm	IP rating	IP66	IP67	IP69K	Accessories	LED module 12V-24V	handle	cable 0,5 m	cable 8 m	switch	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	HB3	H9-H11
CRC3C.50108				✓				✓	✓		✓								✓		
CRC3C.50110				✓				✓	✓		✓	✓	✓								
CRC3C.50181				✓				✓	✓		✓	✓	✓		✓						
CRC3C.50116				✓			✓		✓		✓	✓					✓				
CRC3C.50117				✓				✓	✓		✓	✓						✓			
CRC3C.50118				✓				✓	✓		✓	✓							✓		
CRC3A.48700					✓			✓	✓		✓		✓								
CRC3A.48701					✓			✓	✓		✓										
CRC3A.48780					✓			✓	✓		✓		✓		✓						
CRC3A.48706					✓		✓		✓		✓						✓				
CRC3A.48707					✓			✓	✓		✓							✓			
CRC3A.48708					✓			✓	✓		✓								✓		
CRC3A.48710					✓			✓	✓		✓	✓	✓								
CRC3A.48781					✓			✓	✓		✓	✓	✓		✓						
CRC3A.48716					✓		✓		✓		✓	✓					✓				
CRC3A.48717					✓			✓	✓		✓	✓						✓			
CRC3A.48718					✓			✓	✓		✓	✓							✓		
CRC3A.48794					✓			✓	✓		✓	✓		✓					✓		