



TECHNICAL DATA / FEATURES

- dimensions: $\phi 80 \times 102$, $\phi 84 \times 106$
- light functions: fog light
- function markings: F3
- maximum power: 9W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 3 x LED
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - $+80^{\circ}\text{C}$
- housing's material: aluminium/plastic
- lens' material: glass
- built-in connectors: AMP Faston 250, Deutsch DT
- other: protection:
 - against overheating
 - against reverse polarisation
- bracket made of Inox steel



ADDITIONAL INFORMATION

Universal lamps dedicated for small recess (CDC1) or in places with limited space for installation (CDC2).

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence. Lamps approved according to UNECE Regulation No 19, revision 04, as a light of class F3. Correct polarity required.


Versions with the bracket can be installed on a vehicle in an upright or upside-down position.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- AMP Faston 250 plug 2-pin - cat. No. A.07138
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

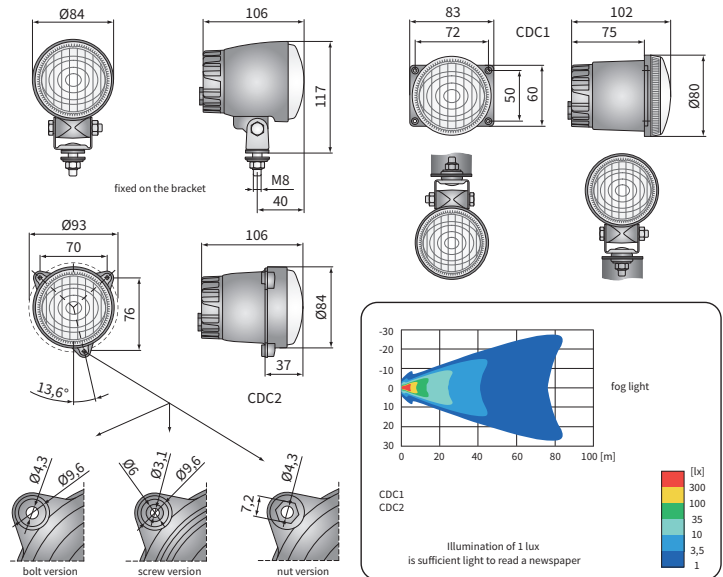

Cat. number	Homologation code	Diameter		IP rating	Accessories			Mounting method	Bracket			Side			Connectors		
		$\phi 80$	$\phi 84$		LED module 12V-24V	cable 0,15 m	cable 0,5 m		4 bolts	M8	3 bolts	right	left	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
CDC1.47210	075	✓					✓		✓								
CDC1.47200	075	✓			✓		✓		✓					✓			2
CDC1.47220	075	✓				✓	✓		✓						✓		2
CDC1.47211	075	✓				✓	✓		✓						✓		2
CDC2.48001	075		✓			✓	✓			✓							
CDC2.48004	075		✓		✓		✓			✓				✓			2
CDC2.48005	075		✓			✓	✓			✓					✓		2
CDC2.48002	075		✓			✓	✓			✓					✓		2
CDC2.48031	075		✓			✓	✓		✓								
CDC2.48033	075		✓		✓		✓		✓					✓			2
CDC2.48034	075		✓			✓	✓		✓						✓		2
CDC2.48032	075		✓			✓	✓		✓					✓			2