



**TECHNICAL DATA / FEATURES**

- dimensions: 138x78x68
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: FF, standard
- light distribution angle: 41° x 32°
- IP rating: IP66
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: -
- other: semipermeable membrane



**ADDITIONAL INFORMATION**

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.

It is possible to install needed connectors on wire (on request).




Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

Additional equipment:

- stone guard - cat. No. A.37900
- lens cover - cat. No. A.37901

**DIMENSIONS**

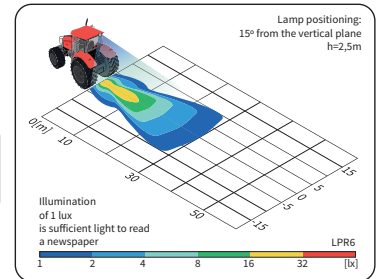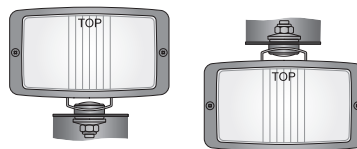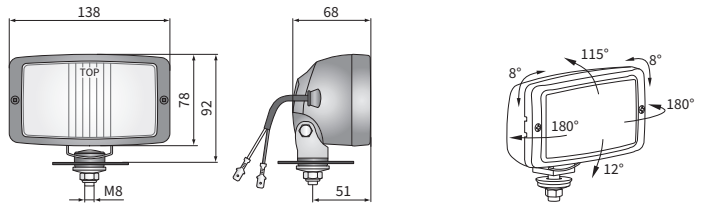

Cat. number	Optics		Beam angle		Accessories				Connectors		Packaging / pc		
	FF	standard	41° x 32°	46° x 15°	bulb H3 12V	bulb H3 24V	stone guard	cable 0,15 m	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	cap / Pin	carton box
<b>LPR6FF.46400</b>	✓		✓					✓					1
<b>LPR6FF.46410</b>	✓		✓		✓			✓					1
<b>LPR6FF.46420</b>	✓		✓			✓		✓					1
LPR6FF.46411	✓		✓		✓			✓	✓			2	1
<b>LPR6.27381</b>		✓	✓					✓					1
<b>LPR6.27382</b>		✓	✓		✓			✓					1
<b>LPR6.27383</b>		✓	✓			✓		✓					1
LPR6.27392		✓	✓		✓		✓	✓	✓			2	1
LPR6.27393		✓	✓			✓	✓	✓		✓		2	1