



TECHNICAL DATA / FEATURES

- dimensions: 138x78x68
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: FF, standard
- light distribution angle: 41° x 32°
- IP rating: IP66
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: -
- other: semipermeable membrane



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.

It is possible to install needed connectors on wire (on request).



Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

Additional equipment:

- stone guard - cat. No. A.37900
- lens cover - cat. No. A.37901

DIMENSIONS

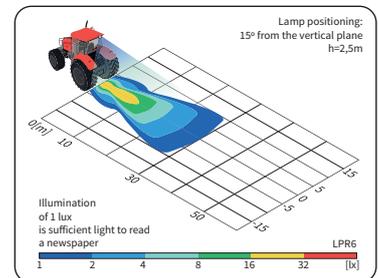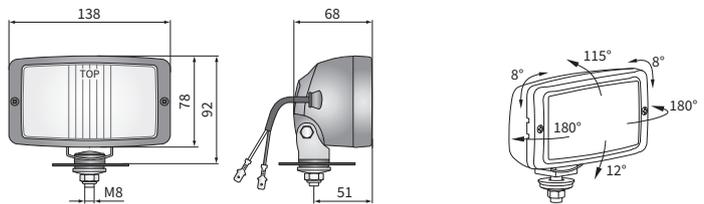

| Cat. number | Optics | | Beam angle | | Accessories | | | | Connectors | | Packaging / pc | | |
|---------------------|--------|----------|------------|-----------|-------------|-------------|-------------|--------------|----------------|------------|-------------------|-----------|------------|
| | FF | standard | 41° x 32° | 46° x 15° | bulb H3 12V | bulb H3 24V | stone guard | cable 0,15 m | AMP Faston 250 | Deutsch DT | AMP SuperSeal 1,5 | cap / Pin | carton box |
| LPR6FF.46400 | ✓ | | ✓ | | | | | ✓ | | | | | 1 |
| LPR6FF.46410 | ✓ | | ✓ | | ✓ | | | ✓ | | | | | 1 |
| LPR6FF.46420 | ✓ | | ✓ | | | ✓ | | ✓ | | | | | 1 |
| LPR6FF.46411 | ✓ | | ✓ | | ✓ | | | ✓ | ✓ | | | 2 | 1 |
| LPR6.27381 | | ✓ | ✓ | | | | | ✓ | | | | | 1 |
| LPR6.27382 | | ✓ | ✓ | | ✓ | | | ✓ | | | | | 1 |
| LPR6.27383 | | ✓ | ✓ | | | ✓ | | ✓ | | | | | 1 |
| LPR6.27392 | | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ | | | 2 | 1 |
| LPR6.27393 | | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | | 2 | 1 |