



TECHNICAL DATA / FEATURES

- dimensions: 138x78x60
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle: 23°
- IP rating: IP54
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: -



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

Mounting: as a freestanding on body panels. They can be installed in an upright or upside down position.




It is possible to install needed connectors on wire (on request).

The products of series LPR5 have been replaced by LPR6 line, offering better IP rating.

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

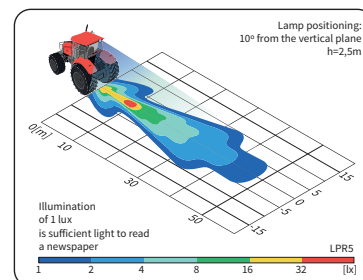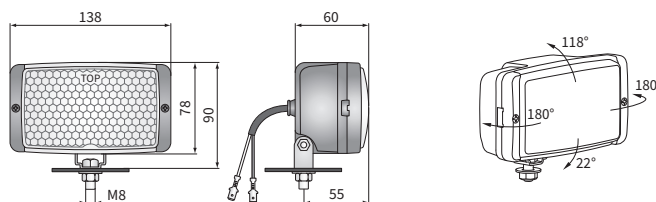

Cat. number	Type	Accessories	Connectors	Packaging / pc
LPR5.21529	✓ H3	bulb H3 12V	AMP Faston 250	1
LPR5.21530	✓	bulb H3 24V	Deutsch DT	1
LPR5.21531	✓	cable 0,15 m	AMP SuperSeal 1,5	1
LPR5.36931	✓			2