



TECHNICAL DATA / FEATURES

- dimensions: 140x140x81
- light functions: position, stop light (main), direction indicator, number plate illumin.
- function markings: RD, SID, 2aD, L
 - traffic: right-hand / left-hand
- source of light: P21W and R10W
- maximum power: 21W, 10W
- nominal voltage: 12V-24V DC
- optics: FF
- IP rating: IP55
- mounting: 2xM6
- housing's material: plastic
- housing's colour: black
- lens' material: plastic
- built-in connectors: -
 - other: shock absorbing system



ADDITIONAL INFORMATION

To be mounted on the back of the vehicle. Possible installation as: left-side, right-side or in vertical position.

Equipped with an extra connection for additional lights, e.g. a portable lamp or a work lamp. It is possible to install needed connectors on wire (on request).


Replacement parts:
composite lens - cat. No. A.41000

Applications:
trucks
trailers
tractors and slow-moving vehicles

Dedicated application:

- A - tractors:
 - Zetor: Proxima and Forterra
 - Ursus, Farmtrac
- B - agricultural machines Claas: combine harvesters, mowers, balers, silage trailers

DIMENSIONS

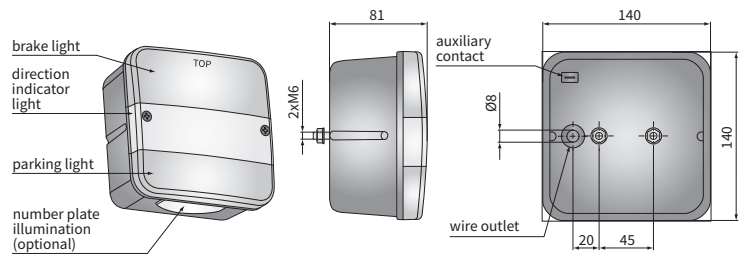

Cat. number	Homologation code	Light functions				Function markings				Accessories					Side		Connectors				Application		Packaging / pc	
		position	stop light (main)	direction indicator	number plate illumin.	RD	SID	2aD	L	bulb P21W 12V	bulb R10W 12V	cable 0,25 m	cable 3,3 m	cable 3,6 m	right	left	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	dedicated	carton box		
LT2.26600	006	✓	✓	✓		✓	✓	✓							✓	✓				A	1			
LT2.26606	006	✓	✓	✓		✓	✓	✓		✓	✓				✓	✓				A	1			
LT2.26601	006	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓	✓		4		A	1			
LT2.26603	006	✓	✓	✓		✓	✓	✓		✓	✓		✓		✓	✓				A	1			
LT2.26602	006	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓	✓				A	1			
LT2.26604	006	✓	✓	✓	✓	✓	✓	✓	✓						✓	✓				B	1			
LT2.26605	006	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓				✓	✓		4		B	1			