

dimensions:	Ø150/142x77				
light functions:	passing	driving	passing	driving	position
function markings:	HC/R		C/R		A
traffic:	right-hand				
reference mark:	-	12,5	-	10	-
source of light:	H4		R2		W5W
maximum power:	75/70W		55/50W		5W
rated voltage:	12÷24V DC				
optics:	FF				
IP rating:	IP54				
housing's material:	plastic, metal				
lens' material:	glass				
other (optional):	mounting plate levelling system				





To be mounted in factory designed locations or in the front bumper recesses.
Approved to be used with H4 and R2 type bulbs.
IP66 rated for versions with hermetic main bulb holder.

Useful parts while installing:
hermetic main bulb holder - cat. No. A.26925
main bulb mounting block - cat. No. A.07128

Replacement parts:
main bulb gasket - cat. No. A.05820
electric levelling unit ø6 long - cat. No. A.09050
hermetic position bulb holder - cat. No. A.26910

Dedicated application:
A - Pasagon light trucks (since 2011)

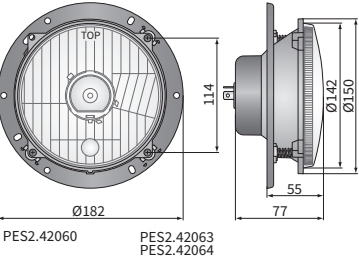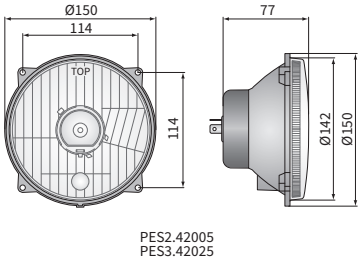

Cat. number	Homologation code	Light functions	passing	driving	position	Accessories	bulb H4 12V	bulb W5W	mounting plate	mounting plate-levelling unit	bulb gasket	manual levelling unit	electric levelling unit	Application	universal	dedicated
PES2.42005	050		✓	✓							✓				✓	
PES2.42025	050		✓	✓	✓						✓				✓	
PES2.42063	050		✓	✓					✓		✓				✓	
PES2.42060	050		✓	✓	✓			✓		✓	✓				✓	
PES2.42030	050		✓	✓	✓				✓	✓	✓	✓			✓	
PES2.42051	050		✓	✓	✓		✓	✓	✓	✓	✓	✓	✓			A

